


KC40

HIGH EFFICIENCY POLYCRYSTALLINE PHOTOVOLTAIC MODULE

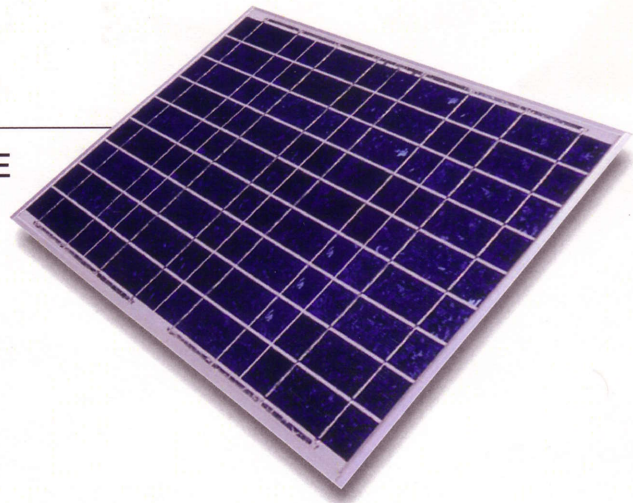

Kyocera is a "ISO9001" and "ISO14001" certified and registered company.

HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities produce a highly efficient polycrystalline photovoltaic module.

The conversion efficiency of the Kyocera solar cell is over 14%.

These cells are encapsulated between a tempered glass cover and an EVA pottant with back sheet to provide maximum protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation. Equipped with plug in connectors.

APPLICATIONS

- Microwave/Radio repeater stations
- Electrification of villages in remote areas
- Medical facilities in rural areas
- Power source for summer vacation homes
- Emergency communication systems
- Water quality and environmental data monitoring systems
- Navigation lighthouses, and ocean buoys
- Pumping systems for irrigation, rural water supplies and livestock watering
- Aviation obstruction lights
- Cathodic protection systems
- Desalination systems
- Railroad signals
- Sailboat charging systems

PERFORMANCE WARRANTY


※2 years limited warranty on material and workmanship

※25 years limited warranty on power output.


(Long term output warranty shall guarantee that loss of output is not more than 10% of the minimum warranty value of the product specifications within 12 years and is not more than 20% within 25 years after the purchase of the product by KYOCERA Faineceramics GmbH. The output values shall be those measured under Kyocera standard measurement conditions.)

ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics of Photovoltaic Module KC40 at various cell temperatures

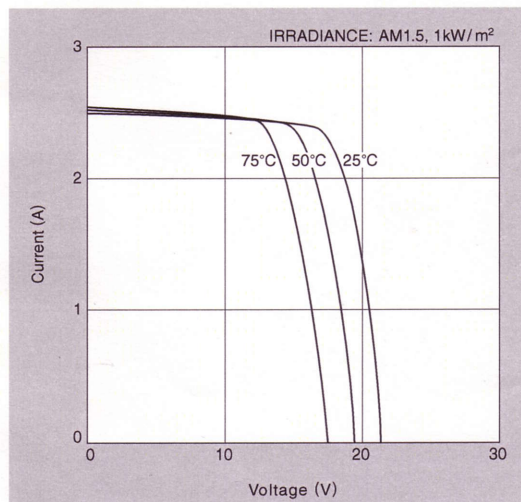

Current-Voltage characteristics of Photovoltaic Module KC40 at various irradiance levels

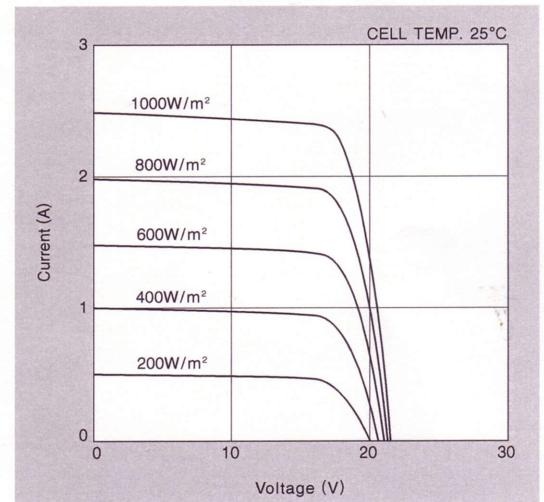

MODEL
KC40